



REFERENCE
FIG. 1

| No | 要件 | | | 具体的の形状 |
|----|----|---|---|--------|
| | ① | ② | ③ | |
| 1 | ○ | ○ | ○ | |
| 2 | ○ | ○ | X | |
| 3 | ○ | X | ○ | |
| 4 | ○ | X | X | |
| 5 | X | - | - | |

present
invention


cited
reference

REF. FIG.
2


REF. FIG. 3

REF. FIG. 4

REF. FIG. 5

present invention

"in a finger-tight position"

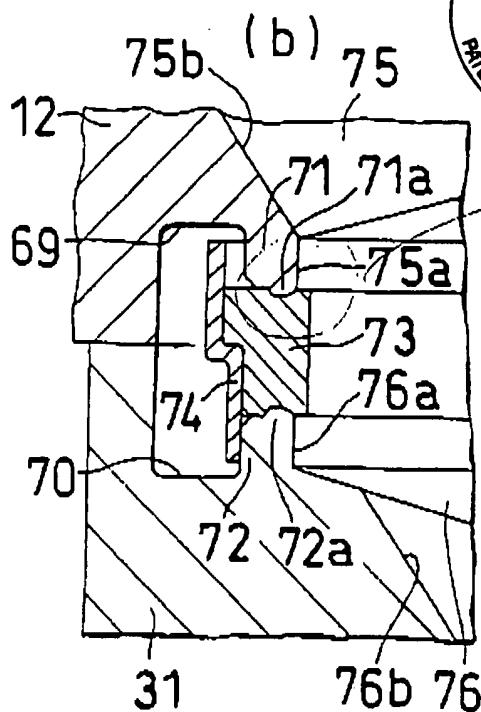

flat face

opening passageway inner dia.

73 71a


annular ridge inner dia.

flat face

"in a fully tightened position"

73

71a

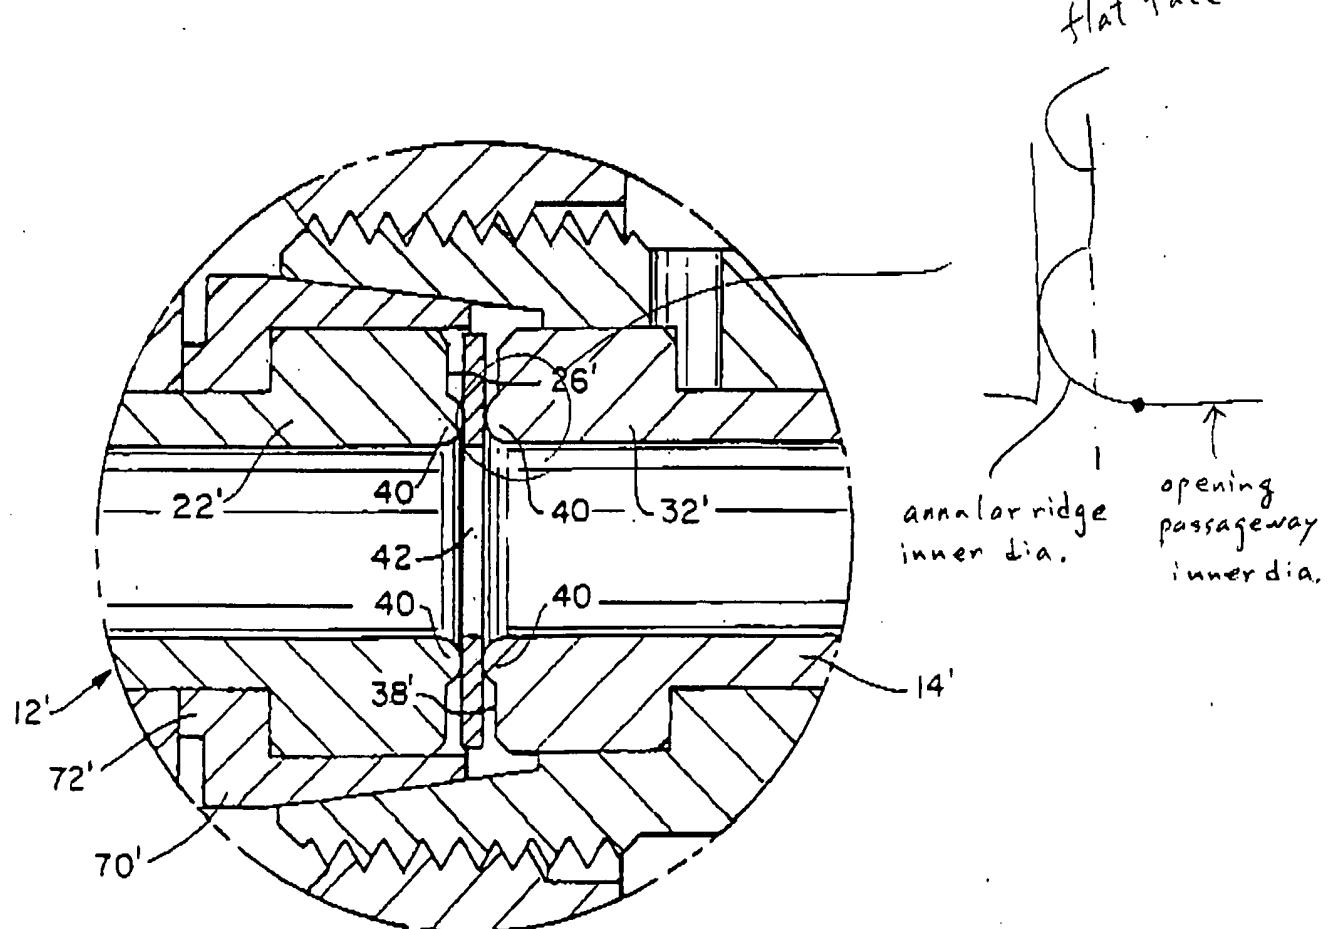

flat face

annular ridge inner dia.

opening passageway inner dia.

FIG.5 (Eidsmore)